



# CATALOG CARD

Model

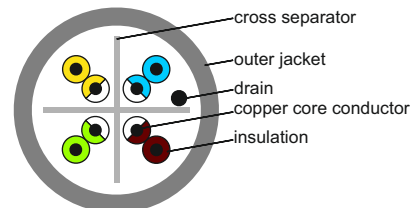

## U/UTP LAN cat.6 305m

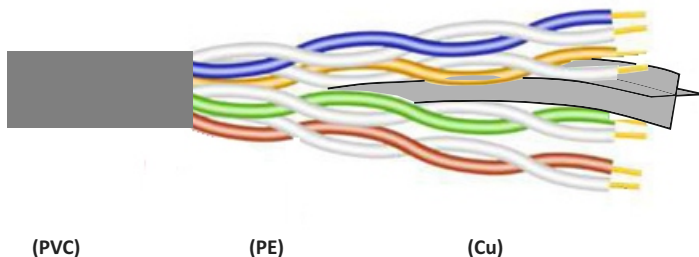

### APPLICABLE STANDARDS

- 1.ISO/IEC 11801:2010. Information technology. Generic cabling for customer premises.
- 2.PN-EN 50173-1:2011. Information technology – Structured cabling systems,  
– Part 1: general requirements (*implement norm EN 50173-1:2011*).
- 3.IEC 61156-5:2002. Multicore and symmetrical pair/quad cables for digital communications  
– Part 5-2: Symmetrical pair/quad cables with transmission characteristics up to 600 MHz  
– Horizontal floor wiring – Capability Approval – Sectional specification.
- 4.TIA/EIA-568-B.2:2001. Commercial Building Telecommunications Cabling Standard. Part 2: Balanced Twisted-Pair. Cabling Components.
- 5.TIA/EIA-568-C.2:2009. Balanced Twisted Pair. Telecommunications Cabling and Components Standard.
- 6.PN-EN 50289-1-2:2007. Telecommunications cables – test methods – Part 1-2: Methods of testing electrical properties – DC resistance.
- 7.PN-EN 50289-1-3:2007. Telecommunications cables – test methods – Part 1-3: Methods of testing electrical properties – electric endurance.
- 8.PN-EN 50289-1-4:2007. Telecommunications cables – test methods – Part 1-4: Methods of testing electrical properties – Insulation resistance.
- 9.PN-EN 50289-1-5:2008. Telecommunications cables – test methods – Part 1-5: Methods of testing electrical properties – Capacity.
- 10.PN-EN 50289-1-8:2010. Telecommunications cables – test methods – Part 1-8: Methods of testing electrical properties – Attenuation.
- 11.PN-EN 50289-1-10:2002. Telecommunications cables – test methods – Part 1-10: Methods of testing electrical properties – Perspicacity.
- 12.PN-EN 50289-1-11:2002. Telecommunications cables – test methods – Part 1-11: Methods of testing electrical properties – Wave impedance, Input impedance, return loss.
- 13.EN 50575:2014, EN 13501-6:2014 CPR directive (CE)
- 14.Directive 2011/65/EU with an annex II 2015/863 (RoHS 3)

### TECHNICAL DATA

Type: U/UTP  
 Category: 6  
 Internal conductor: 100% CU, four pairs twisted asymmetrically  
 Wires insulation: HDPE polyethylene (PE)  
 Cross separator: polyethylene (PE)  
 Outer sheath: PVC, Gray color  
 Outside diameter:  $\varnothing 6.3 \pm 0.02$  mm  
 Flammability class: Eca  
 Working temperature:  $-20$  oC ÷  $+70$  oC  
 Laying temperature:  $0$  oC ÷  $+70$  oC  
 Purpose: Inside buildings  
 Compliance with standards: ISO/IEC 11801:2010, EN 13501-6:2014 (CPR), EN 50173-1:2011, EN 50575:2014, IEC 61156-5:2002 oraz TIA/EIA 568-B.2:2001  
 Length: 305 m.  
 Brand: CONOTECH

**Novisat LLC**  
 37b Zaporoska street  
 53519 Wrocław  
 Poland

tel.+4871 799 09 34  
 www.novisat.pl  
 mail: novisat@novisat.pl

**Date**  
 2022-01-10

# CATALOG CARD

Model



## U/UTP LAN cat.6 305m

### ELECTRICAL DATA

Conductor resistance [ $\Omega/\text{km}$ ] :  $\leq 150$   
Conductor resistance asymmetry [%] :  $\leq 3,0$   
Effective capacity [ $\text{nF}/\text{km}$ ] :  $50 \pm 3$   
Capacitance asymmetry [ $\text{pF}/\text{km}$ ] :  $\leq 1600$   
Conductor insulation resistance [ $\Omega/\text{km}$ ] :  $\geq 150$   
Insulation resistance to test voltage (DC, 1min.) [V/AC] : 1000  
Effective attenuation by  $f=125 \text{ MHz}$  [dB] :  $\leq 33,0$   
Near-pass loss (NEXT) by  $f=125 \text{ MHz}$  [dB] :  $\geq 39,0$   
Total Near-pass loss (PS NEXT) przy  $f=125 \text{ MHz}$  [dB] :  $\geq 36,0$   
Return loss (RL) by  $f=125 \text{ MHz}$  [dB] :  $\geq 17,3$

### PRODUCT DESCRIPTION

High quality network cable, unshielded U/UTP LAN cable category 6, consists of four pairs of asymmetrically twisted wires made of pure copper. The conductors insulation are made of HDPE polyethylene, which is characterized by high density and particularly high dielectric insulation. It has a cross separator that reduces interference between pairs of veins. The outer sheath is made of gray PVC with an outer diameter of  $\varnothing 6.30 \pm 0.02 \text{ mm}$ , which protects against mechanical damage. The 305 m long twisted-pair cable is packed in an Easy Pull Box carton, which enables fast cable laying. The cable are intended for permanent installation inside the bulidings and industrial networks:

- Accordance with CPR (CE)
- Norms: EN 50575:2014
- Reaction to fire: ECA
- Certificated by Institute of Communication.

### IMPLEMENTATION

Twisted-pair cable enables data transmission in both analog and digital form. It is used to create wired connections in ICT installations. The cable is used for permanent installation in the structured cabling of buildings, as well as in industrial networks. Its functional properties ensure simple and comfortable locating inside buildings, bearing in mind the safety of the installation.

### MEASUREMENT

Graph 1: Cat.6 cables resistance of pairs of conductors and asymmetry of resistance measurement results.

Cable model	Track	Wire	Conductor resistance [ $\Omega/\text{km}$ ]	Resistance asymmetry [%]
UTP cat.6	1	a	89,337	0,23
		b	88,926	
	2	a	90,244	0,25
		b	90,703	
	3	a	90,546	0,27
		b	91,036	
	4	a	91,705	0,20
		b	91,336	
Requirements	-	-	$\leq 150$	$\leq 3,0$

**Novisat LLC**  
37b Zaporoska street  
53519 Wroclaw  
Poland

tel.+4871 799 09 34  
www.novisat.pl  
mail: novisat@novisat.pl

**Date**  
2022-01-10

# CATALOG CARD

Model

**U/UTP LAN cat.6 305m**

Graph 2: Cat.6 cable effective capacitance and capacitance asymmetry measurements results.

Cable model	Track	Effective capacity [nF/km]	Capacitance asymmetry [pF/km]
<b>UTP cat.6</b>	1	48,44	84
	2	46,83	112
	3	46,06	312
	4	49,68	48
<b>Requirements</b>	-	-	≤ 1600

Graph 3: Cat.6 cable insulation resistance measurement results.

Cable model	Track	Wire	Insulation resistance [Ω/km]
<b>UTP cat.6</b>	1	a	$1,1 \cdot 10^5$
		b	$1,4 \cdot 10^5$
	2	a	$1,5 \cdot 10^5$
		b	$9,3 \cdot 10^4$
	3	a	$8,1 \cdot 10^4$
		b	$1,2 \cdot 10^5$
	4	a	$1,6 \cdot 10^5$
		b	$9,0 \cdot 10^4$
<b>Requirements</b>	-	-	≥ 150

Graph 4: Cat.6 cable effective attenuation measurements results at the frequency of  $f = 250$  MHz

Cable model	Track	Effective attenuation [dB]
<b>UTP cat.6</b>	1	31,70
	2	32,00
	3	31,80
	4	32,40
<b>Requirements</b>	-	≤ 33,0

**Novisat LLC**  
37b Zaporoska street  
53519 Wrocław  
Poland

tel.+4871 799 09 34  
www.novisat.pl  
mail: novisat@novisat.pl

**Date**  
2022-01-10

# CATALOG CARD

Model

**U/UTP LAN cat.6 305m**Graph 5: Cat.6 cable near-pass loss (NEXT) measurements results at the frequency  $f = 250$  MHz

Cable model	Track	Near-pass loss (NEXT) [dB]
UTP cat.6	1-2	52,70
	1-3	58,00
	1-4	55,30
	2-3	50,10
	2-4	56,90
	3-4	58,80
Requirements	-	$\geq 39,0$

Graph 6: Cat.6 cable total near-pass loss (PS NEXT) measurements results at the frequency  $f = 250$  MHz

Cable model	Track	Total near-pass loss (PS NEXT) [dB]
UTP cat.6	1	50,04
	2	47,65
	3	48,68
	4	52,00
Requirements	-	$\geq 36,0$

Graph 7: Cat.6 cable return loss (RL) measurements results at the frequency  $f = 250$  MHz

Cable model	Track	Return loss (RL) [dB]
UTP cat.6	1	19,20
	2	18,30
	3	19,00
	4	19,60
Requirements	-	$\geq 17,3$

## TEST EQUIPMENT

1. Universal meter U1242A
2. Digital voltmeter V-541
3. Megohmmeter HP4339B Helwett Packard
4. Fluke multimeter RLC PM 6304
5. Network analyzer 8753C Agilent
6. Balance transformer 3P 50/100Ω 3P
7. Puncture tester TP5S P.A.I.P.
8. Temperature and humidity meter - HMI 41

**Novisat LLC**  
37b Zaporoska street  
53519 Wrocław  
Poland

tel.+4871 799 09 34  
www.novisat.pl  
mail: novisat@novisat.pl

**Date**  
2022-01-10